



CUMMINS INC.
Columbus, IN 47201
Marine Performance Curves

Basic Engine Model
KTA50-M2

Engine Configuration
D283033MX02

Curve Number:
M-6211


CPL Code:
8063

Date:
21-Sep-09

Displacement: **50 liter** [3068 in³]
Bore: **159 mm** [6.25 in]
Stroke: **159 mm** [6.25 in]
Fuel System: **PT (CENTRY AND V.S.)**
Cylinders: **16**
Rated Power: **1342 kw** [1800 bhp]
Rated Speed: **1900 rpm**
Rating Type: **Heavy Duty**
Aspiration: **Turbocharged / Low Temperature Aftercooled**

CERTIFIED: This diesel engine complies with or is certified to the following agencies requirements:

IMO - NOx requirements of the International Maritime Organization (IMO), MARPOL 73/78 Annex VI, Regulation 13

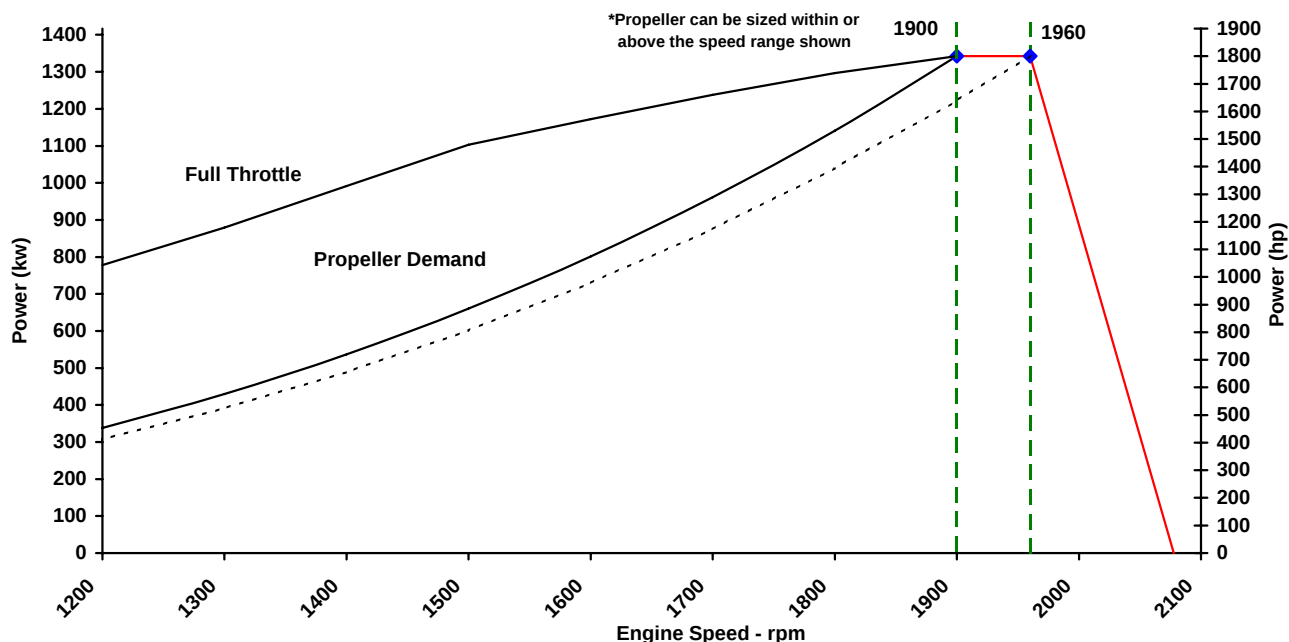

Speed	Full Throttle- Power	Full Throttle- Torque	Fuel Cons.- Prop. Curve 3.0 Exp
rpm	kw (hp)	N·m (ft·lb)	L/hr (gal/hr)
1960	1342 (1800)	6539 (4823)	
1900	1342 (1800)	6745 (4975)	336.0 (88.8)
1800	1297 (1739)	6881 (5075)	292.0 (77.1)
1700	1238 (1660)	6954 (5129)	250.0 (66.0)
1600	1172 (1571)	6993 (5158)	210.6 (55.6)
1500	1103 (1479)	7020 (5178)	174.4 (46.1)
1400	991 (1329)	6761 (4987)	143.4 (37.9)
1300	879 (1178)	6455 (4761)	115.1 (30.4)
1200	778 (1044)	6193 (4568)	93.0 (24.6)

* Cummins Full Throttle Requirements:

- Engine achieves or exceeds rated rpm at full throttle under any steady operating condition
- Engines in variable displacement boats (such as pushboats, tugboats, net dragners, etc.) achieve no less than 100 rpm below rated speed at full throttle during a dead push or bollard pull
- Engine achieves or exceeds rated rpm when accelerating from idle to full throttle

Rated Conditions: Ratings are based upon ISO 15550 reference conditions; air pressure of 100 kPa [29.612 in Hg], air temperature 25deg. C [77 deg. F] and 30% relative humidity. Power is in accordance with IMCI procedure. Member NMMA. Unless otherwise specified, tolerance on all values is +/-5%.

Full Throttle curve represents power at the crankshaft for mature gross engine performance corrected in accordance with ISO 15550. Propeller Curve represents approximate power demand from a typical propeller. Propeller Shaft Power is approximately 3% less than rated crankshaft power after typical reverse/reduction gear losses and may vary depending on the type of gear or propulsion system used.

Fuel Consumption is based on fuel of 35 deg. API gravity at 16 deg C [60 deg. F] having LHV of 42,780 kJ/kg [18390 Btu/lb] and weighing 838.9 g/liter [7.001 lb/U.S. gal].

Heavy Duty (HD): Intended for continuous use in variable load applications where full power is limited to eight (8) hours out of every ten (10) hours of operation. Also, reduced power operations must be at or below 200 rpm of the maximum rated rpm. This is an ISO 15550 fuel stop power rating and is for applications that operate 5,000 hours per year or less.

Steve T. Helt

CHIEF ENGINEER

Propulsion Marine Engine Performance Data

Curve No. M-6211
DS : 4998
CPL : 8063
DATE: 21-Sep-09

General Engine Data

Engine Model	KTA50-M2
Rating Type	Heavy Duty
Rated Engine Power	1342 [1800]
Rated Engine Speed	1900
Rated Power Production Tolerance	3
Rated Engine Torque	6746 [4976]
Peak Engine Torque @ 1500 rpm.....	7020 [5178]
Brake Mean Effective Pressure	1686 [245]
Indicated Mean Effective Pressure.....	3382 [491]
Maximum Allowable Engine Speed	2375
Maximum Torque Capacity from Front of Crank ²	4341 [3202]
Compression Ratio	13.9:1
Piston Speed	10.1 [1979]
Firing Order	1R-1L-3R-3L-2R-2L-5R-4L- 8R-8L-6R-6L-7R-7L-4R-5L
Weight (Dry) - Engine Only - Average	5166 [11389]
Weight (Dry) - Engine With Heat Exchanger System - Average.....	5742 [12659]
Weight Tolerance (Dry) Engine Only	10.0

Governor Settings

Default Droop Value.....	Refer to MAB 2.04.00-03/23/2006 for Droop explanation	6%
Minimum Droop Allowed.....		N/A
Maximum Droop Allowed.....		N/A
High Speed Governor Break Point.....		1960
Minimum Idle Speed Setting		650
Normal Idle Speed Variation		25
High Idle Speed Range Minimum		1960
High Idle Speed Range Maximum		2128

Noise and Vibration

Average Noise Level - Top	(Idle)..	96
	(Rated)	106
Average Noise Level - Right Side	(Idle)..	94
	(Rated)	104
Average Noise Level - Left Side	(Idle)..	95
	(Rated)	104
Average Noise Level - Front	(Idle)..	94
	(Rated)	104

Fuel System¹

Avg. Fuel Consumption - ISO 8178 E3 Standard Test Cycle	232.8 [61.5]
Fuel Consumption at Rated Speed	336.0 [88.8]
Approximate Fuel Flow to Pump	590.5 [156.0]
Maximum Allowable Fuel Supply to Pump Temperature	60.0 [140]
Approximate Fuel Flow Return to Tank	254.5 [67.2]
Approximate Fuel Return to Tank Temperature	70.5 [159]
Maximum Heat Rejection to Drain Fuel	4.0 [226]
Fuel Pressure - Pump Out/Rail . Mechanical Gauge	1064 [154]
INSITE Reading	1089 [158]

TBD= To Be Determined

N/A = Not Applicable

N.A. = Not Available

¹ Unless otherwise specified, all data is at rated power conditions and can vary $\pm$ 5%.

² No rear loads can be applied when the FPTO is fully loaded. Max PTO torque is contingent on torsional analysis results for the specific drive system. Consult Installation Direction Booklet for Limitations.

³ Heat rejection to coolant values are based on 50% water/50% ethylene glycol mix and do NOT include fouling factors. If sourcing your own cooler, a service fouling factor should be applied according to the cooler manufacturer's recommendation.

⁴ Consult option notes for flow specifications of optional Cummins seawater pumps, if applicable.

⁵ May not be at rated load and speed. Maximum heat rejection may occur at other than rated conditions.

CUMMINS ENGINE COMPANY, INC
COLUMBUS, INDIANA

All Data is Subject to Change Without Notice - Consult the following Cummins intranet site for most recent data:

<http://marine.cummins.com/>

Propulsion Marine Engine Performance Data

Curve No. M-6211
DS : 4998
CPL : 8063
DATE: 21-Sep-09

Air System¹

Intake Manifold Pressure	kPa [in Hg]	201 [59]
Intake Air Flow	l/sec [cfm]	1906 [4038]
Heat Rejection to Ambient	kW [Btu/min]	81 [4615]

Exhaust System¹

Exhaust Gas Flow	l/sec [cfm]	4518 [9573]
Exhaust Gas Temperature (Turbine Out)	°C [°F]	443 [829]
Exhaust Gas Temperature (Manifold)	°C [°F]	624 [1154]

Emissions (in accordance with ISO 8178 Cycle E3)

NOx (Oxides of Nitrogen)	g/kw-hr [g/hp-hr]	8.75 [6.52]
HC (Hydrocarbons)	g/kw-hr [g/hp-hr]	0.24 [0.18]
CO (Carbon Monoxide)	g/kw-hr [g/hp-hr]	0.42 [0.31]
PM (Particulate Matter)	g/kw-hr [g/hp-hr]	N.A.

Cooling System¹

Sea Water Pump Specifications	MAB 0.08.17-07/16/2001	
Pressure Cap Rating (With Heat Exchanger Option)	kPa [psi]	103 [15]
Max. Pressure Drop Across Any External Cooling System Circuit	kPa [psi]	34 [5]

Engines with Low Temperature Aftercooling (LTA)

Two Loop LTA

Main Engine Circuit

Coolant Flow to Main Cooler (with blocked open thermostat).....	l/min [gal/min]	1181 [312]
Standard Thermostat Operating Range	Start to open.....°C [°F]	82 [180]
	Full open.....°C [°F]	95 [202]
Heat Rejection to Engine Coolant ³	kW [Btu/min]	522 [29684]

Aftercooler (LTA) Circuit

Coolant Flow to LTA Cooler (with blocked open thermostat).....	l/min [gal/min]	303 [80]
LTA Thermostat Operating Range	Start to open.....°C [°F]	66 [150]
	Full open.....°C [°F]	80 [175]
Heat Rejection to Engine Coolant ³	kW [Btu/min]	257 [14644]
Maximum Coolant Inlet Temperature from LTA Cooler.....	°C [°F]	71 [160]

TBD= To Be Determined

N/A = Not Applicable

N.A. = Not Available

¹ Unless otherwise specified, all data is at rated power conditions and can vary ± 5%.

² No rear loads can be applied when the FPTO is fully loaded. Max PTO torque is contingent on torsional analysis results for the specific drive system. Consult Installation Direction Booklet for Limitations.

³ Heat rejection to coolant values are based on 50% water/50% ethylene glycol mix and do NOT include fouling factors. If sourcing your own cooler, a service fouling factor should be applied according to the cooler manufacturer's recommendation.

⁴ Consult option notes for flow specifications of optional Cummins seawater pumps, if applicable.

⁵ May not be at rated load and speed. Maximum heat rejection may occur at other than rated conditions.

CUMMINS ENGINE COMPANY, INC
COLUMBUS, INDIANA

All Data is Subject to Change Without Notice - Consult the following Cummins intranet site for most recent data:

<http://marine.cummins.com/>